
FIBER SPECIFICATIONS*				
FIBER TYPE	CORE DIAMETER	CLADDING DIAMETER	NA	WAVELENGTH RANGE
FT200EMT	200 ± 5 µm	225 ± 5 µm	0.39	400 - 2200 nm

*SPECIFICATIONS BASED ON BARE FIBER DATA

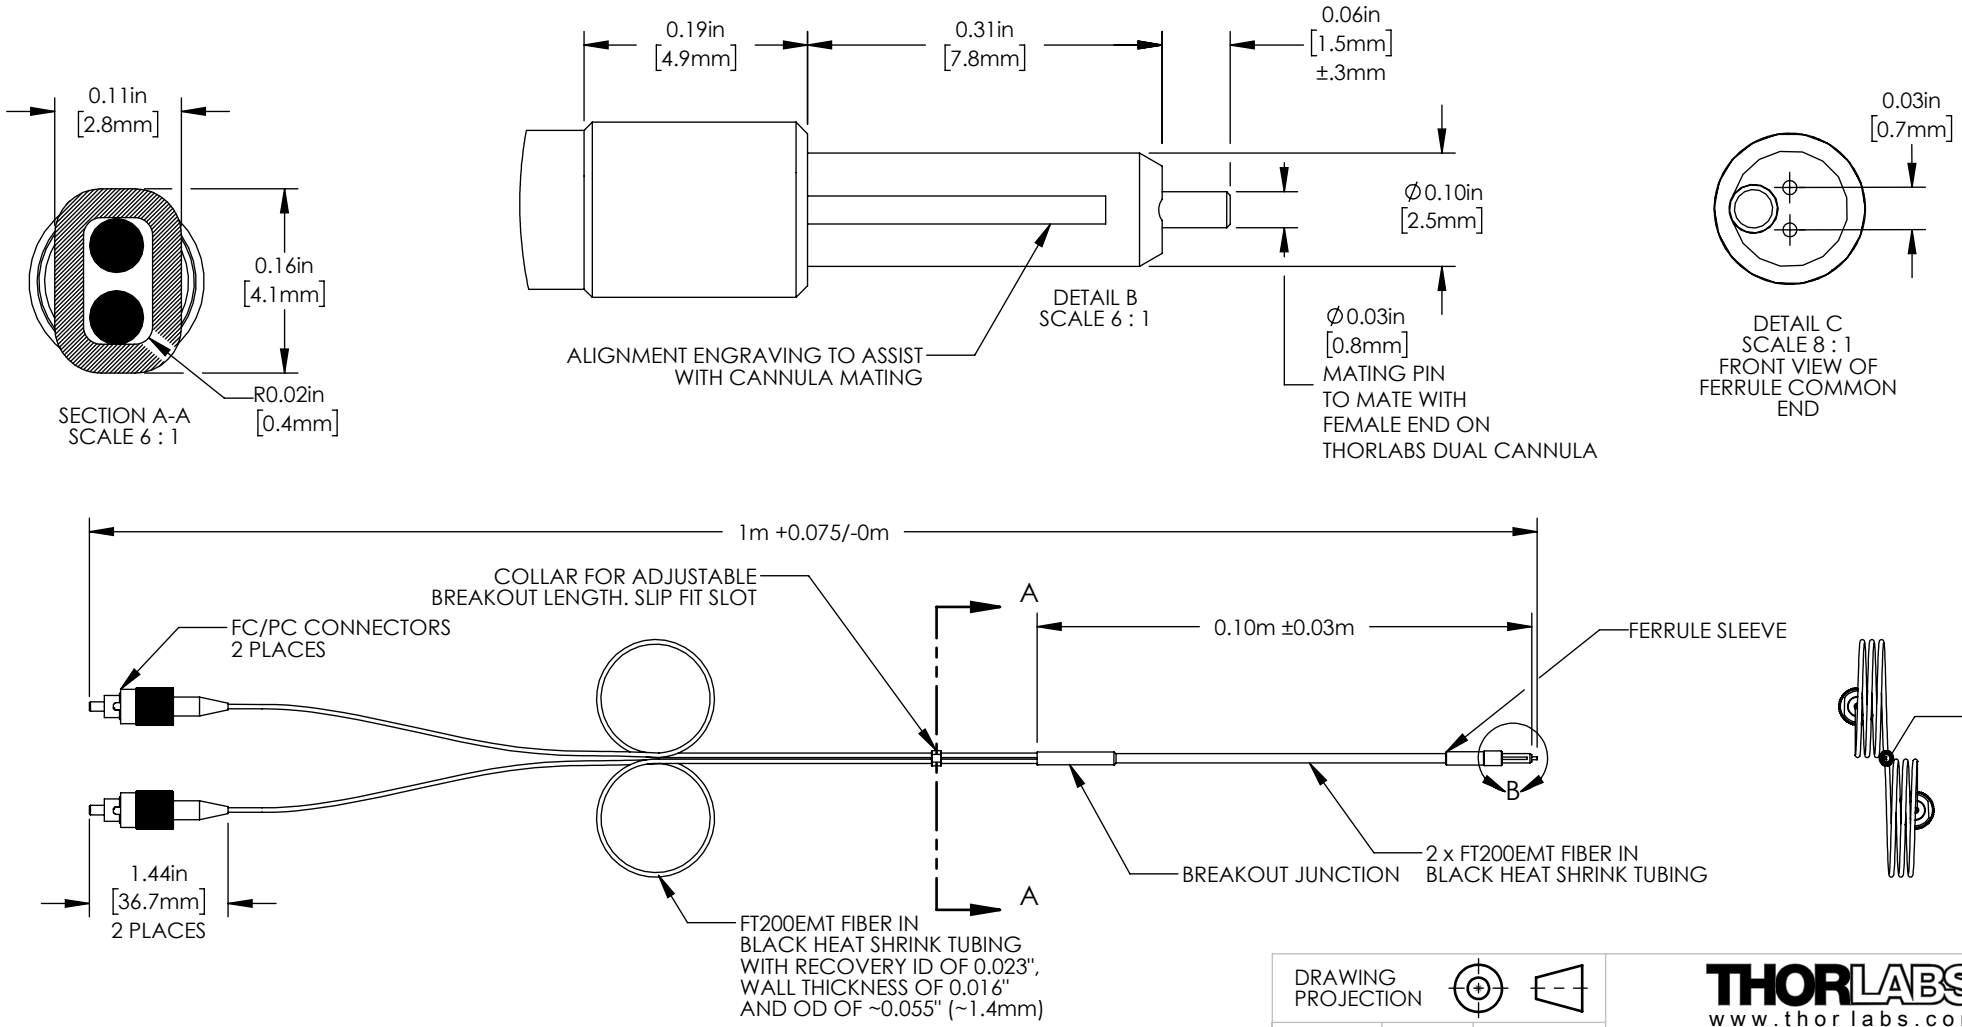

INCLUDED BUT NOT SHOWN:
3 RUBBER DUST CAPS

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	CAL	23/JAN/15
APPROVAL	BAG	07/JUL/16

COPYRIGHT © 2016 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

Y CABLE FOR DUAL CANNULA,
700µm SPACING,0.39 NA, LOW OH, FC/PC, 1m

MATERIAL	REV
N/A	B

ITEM #	APPROX WEIGHT
BFY32FL1	118g