

FIBER SPECIFICATIONS*				
FIBER TYPE	CORE DIAMETER	CLADDING DIAMETER**	NA	OPERATING WAVELENGTH
FT200EMT	200 ± 5 µm	225 ± 5 µm	0.39 ± 0.02	400 - 2200 nm

*SPECIFICATIONS BASED ON BARE-FIBER DATA
** OUTER DIAMETER OF FIBER PROTRUDING FROM FERRULE

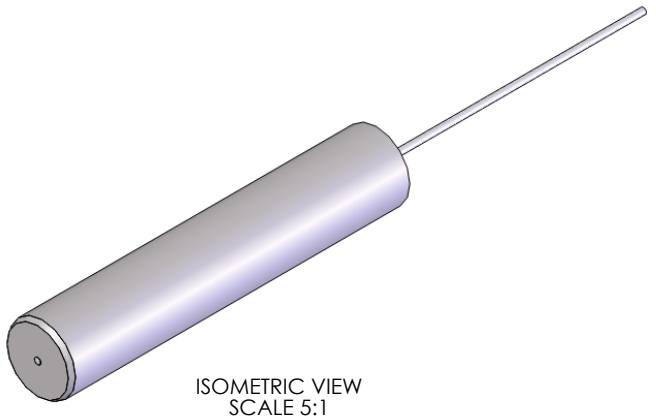

ISOMETRIC VIEW
SCALE 5:1

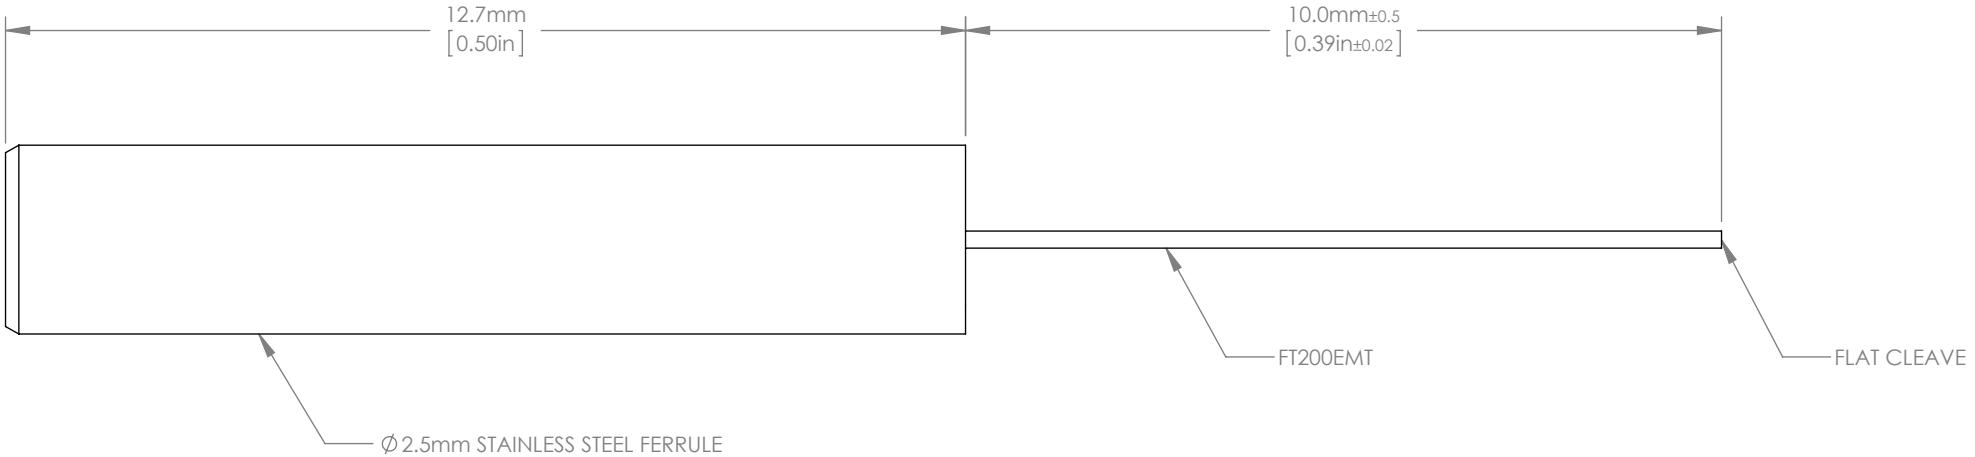

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	JS	12/16/11
APPROVAL	KAH	02/APR/12

COPYRIGHT © 2011 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

Fiber Cannula, 200um, 0.39NA, 10mm

MATERIAL	REV
N/A	A

ITEM #	APPROX WEIGHT
CFM12L10	0.18 g