

FIBER SPECIFICATIONS*					
FIBER TYPE	CORE DIAMETER	CLADDING DIAMETER**	COATING DIAMETER	NA	OPERATING WAVELENGTH
FT400EMT	400 ± 8 µm	425 ± 10 µm	730 ± 30 µm	0.39	400 - 2200 nm

*SPECIFICATIONS BASED ON BARE-FIBER DATA
** OUTER DIAMETER OF FIBER PROTRUDING FROM FERRULE

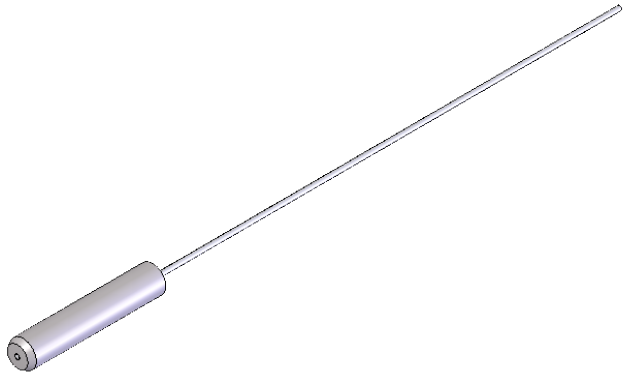

ISOMETRIC VIEW
SCALE 2 : 1

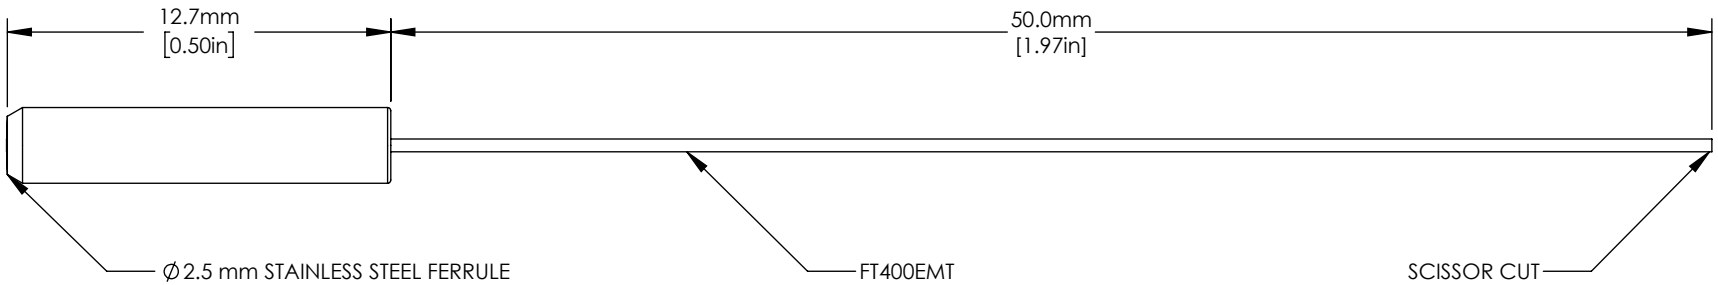

NOTE: DRAWING SHOWS QUANTITY OF ONE (1) PIECE ONLY.
PRODUCT IS SOLD IN PACK OF TWENTY (20).
WEIGHT SHOWN IS FOR ONE (1) PIECE ONLY.

INCLUDED BUT NOT SHOWN:
1 PROTECTIVE DUST CAP

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	JB	05/OCT/17
APPROVAL	CD	09/OCT/17

COPYRIGHT © 2017 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

2.5 mm STAINLESS STEEL FIBER OPTIC CANNULA
400µm, 0.39 NA, UNCLEAVED 20 PACK

MATERIAL	REV
N/A	A

ITEM #	APPROX WEIGHT
CFM14U-20	0.40 g