

FIBER SPECIFICATIONS*					
FIBER TYPE	CORE DIAMETER	CLADDING DIAMETER	COATING DIAMETER**	NA	OPERATING WAVELENGTH
FG200UCC	200 µm ± 8 µm	240 µm ± 5 µm	260 µm ± 6 µm	0.22 ± 0.02	250 - 1200 nm

*SPECIFICATIONS BASED ON BARE-FIBER DATA
** OUTER DIAMETER OF FIBER PROTRUDING FROM FERRULE

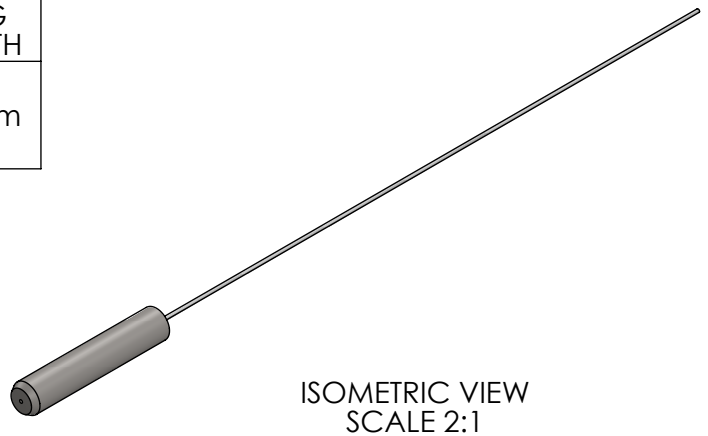

ISOMETRIC VIEW
SCALE 2:1

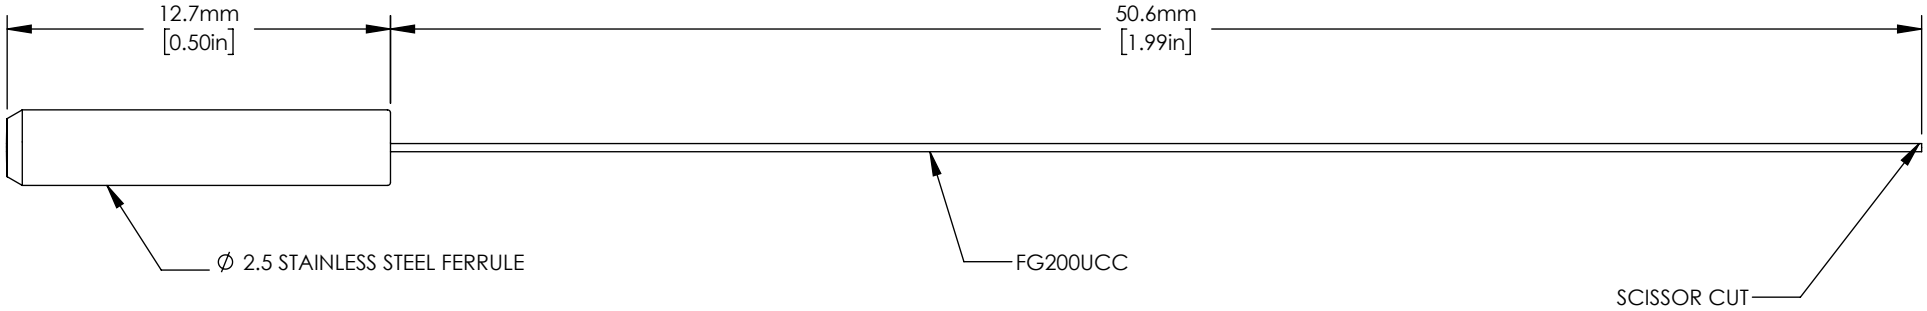

NOTE: DRAWING SHOWS QUANTITY OF ONE (1) PIECE ONLY.
PRODUCT IS SOLD IN PACK OF TWENTY (20).
*WEIGHT SHOWN IS FOR ONE (1) PIECE ONLY.

*INCLUDED BUT NOT SHOWN:
1 PROTECTIVE DUST CAP

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	CAL	18/SEP/13
APPROVAL	BAG	24/MAY/17

COPYRIGHT © 2017 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

2.5mm STAINLESS FIBER OPTIC CANNULA
200µm, 0.22NA, UNCLEAVED 20 Pack

MATERIAL	REV
N/A	C

ITEM #	APPROX WEIGHT
CFM22U-20	0.40 g