

FIBER SPECIFICATIONS*					
FIBER TYPE	CORE DIAMETER	CLADDING DIAMETER**	COATING DIAMETER	NA	OPERATING WAVELENGTH
FP200URT	200 µm ± 5 µm	225 µm ± 5 µm	500 ± 30 µm	0.50 ± 0.02	300 - 1200 nm

*SPECIFICATIONS BASED ON BARE-FIBER DATA
** OUTER DIAMETER OF FIBER PROTRUDING FROM FERRULE

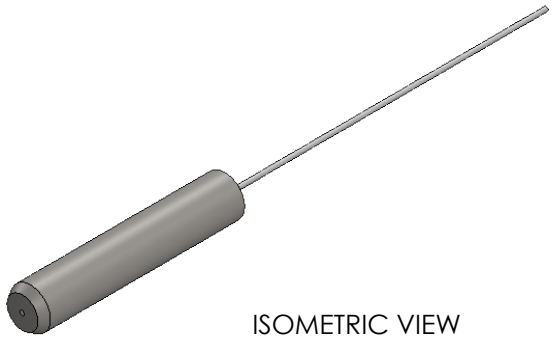

ISOMETRIC VIEW
SCALE 3:1

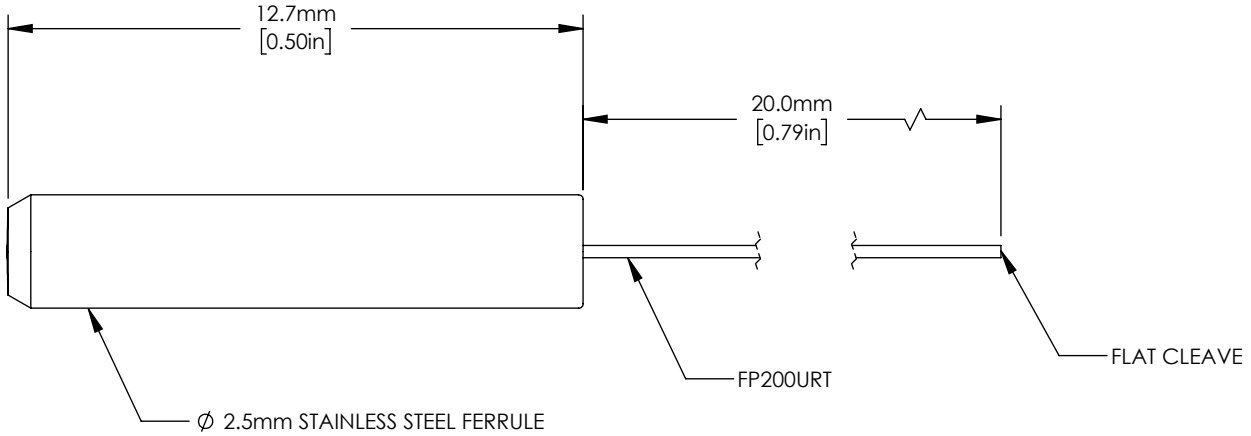

INCLUDED BUT NOT SHOWN:
*PROTECTIVE DUST CAP

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	IR	23/MAR/17
APPROVAL	CL	24/MAR/17

COPYRIGHT © 2017 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

2.5mm STAINLESS FIBER OPTIC CANNULA
200µm 0.50NA, 20mm LONG

MATERIAL	REV
N/A	A

ITEM #	APPROX WEIGHT
CFM52L20	0.40 g