

FIBER SPECIFICATIONS*					
FIBER TYPE	CORE DIAMETER	CLADDING DIAMETER**	COATING DIAMETER	NA	OPERATING WAVELENGTH
FT300EMT	300 ± 6 µm	325 ± 10 µm	650 ± 30 µm	0.39 ± 0.02	400 - 2200 nm

*SPECIFICATIONS BASED ON BARE-FIBER DATA
** OUTER DIAMETER OF FIBER PROTRUDING FROM FERRULE

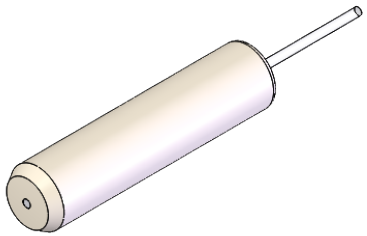

ISOMETRIC VIEW
SCALE 4:1

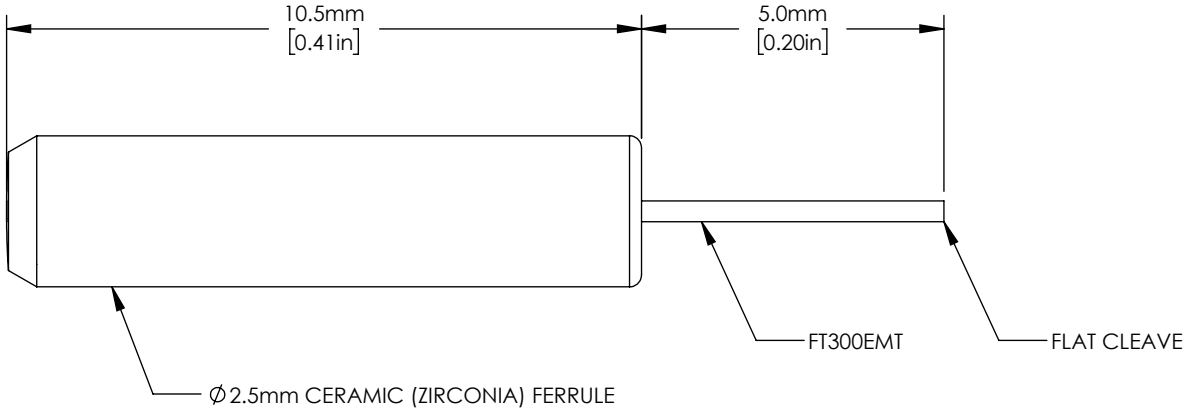

*INCLUDED BUT NOT SHOWN:
1 PROTECTIVE DUST CAP

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	JS	29/AUG/12
APPROVAL	BAG	24/MAY/17

COPYRIGHT © 2017 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

2.5mm CERAMIC FIBER OPTIC CANNULA
300µm 0.39NA, 5mm LONG

MATERIAL: N/A
REV: B

ITEM #: CFMC13L05
APPROX WEIGHT: 0.30 g