

FIBER SPECIFICATIONS*					
FIBER TYPE	CORE DIAMETER	CLADDING DIAMETER**	COATING DIAMETER	NA	OPERATING WAVELENGTH
FT400EMT	400 ± 8 µm	425 ± 10 µm	730 ± 30 µm	0.39 ± 0.02	400 - 2200 nm

*SPECIFICATIONS BASED ON BARE-FIBER DATA
** OUTER DIAMETER OF FIBER PROTRUDING FROM FERRULE



ISOMETRIC VIEW
SCALE 4:1

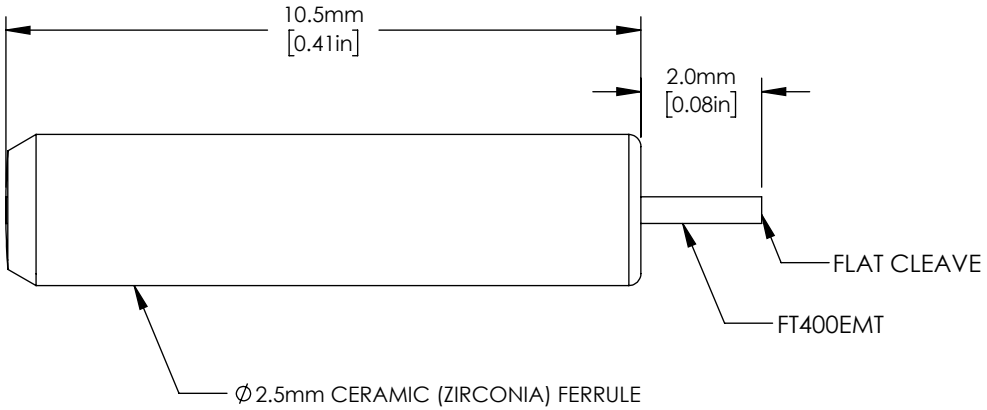

*INCLUDED BUT NOT SHOWN:
1 PROTECTIVE DUST CAP

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	JS	05/SEP/13
APPROVAL	BAG	24/MAY/17

COPYRIGHT © 2017 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

2.5mm CERAMIC FIBER OPTIC CANNULA, 400µm 0.39NA, 2mm LONG

MATERIAL	REV
N/A	B

ITEM #	APPROX WEIGHT
CFMC14L02	0.30 g