

| FIBER SPECIFICATIONS* | | | | | |
|---|---|---|---|---|---|
| FIBER TYPE | CORE DIAMETER | CLADDING DIAMETER** | COATING DIAMETER | NA | OPERATING WAVELENGTH |
| FP400URT | 400 ± 8 µm | 425 ± 10 µm | 730 ± 30 µm | 0.50 | 300 - 1200 nm |

*SPECIFICATIONS BASED ON BARE-FIBER DATA
** OUTER DIAMETER OF FIBER PROTRUDING FROM FERRULE



ISOMETRIC VIEW
SCALE 4:1

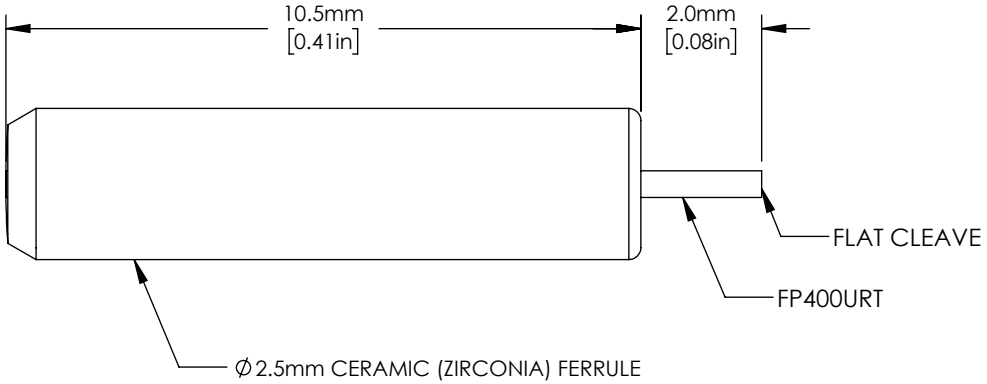


*INCLUDED BUT NOT SHOWN:
1 PROTECTIVE DUST CAP

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

| DRAWING PROJECTION | | |
|---|---|---|
| | NAME | DATE |
| DRAWN | IR | 12/MAY/18 |
| APPROVAL | CL | 17/MAY/18 |

COPYRIGHT © 2018 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

2.5mm CERAMIC FIBER OPTIC CANNULA, 400µm 0.50NA, 2mm LONG

| MATERIAL | REV |
|---|---|
| N/A | A |

| ITEM # | APPROX WEIGHT |
|---|---|
| CFMC54L02 | 0.30 g |