

FIBER SPECIFICATIONS*					
FIBER TYPE	CORE DIAMETER	CLADDING DIAMETER**	COATING DIAMETER	NA	OPERATING WAVELENGTH
FP400URT	400 ± 8 µm	425 ± 10 µm	730 ± 30 µm	0.50	300 - 1200 nm

*SPECIFICATIONS BASED ON BARE-FIBER DATA
** OUTER DIAMETER OF FIBER PROTRUDING FROM FERRULE

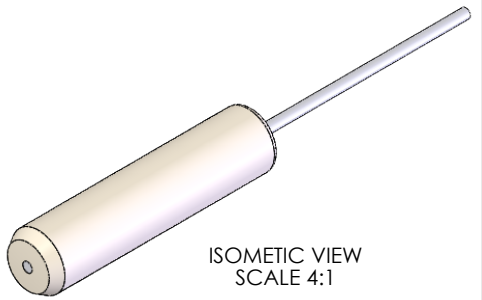

ISOMETIC VIEW
SCALE 4:1

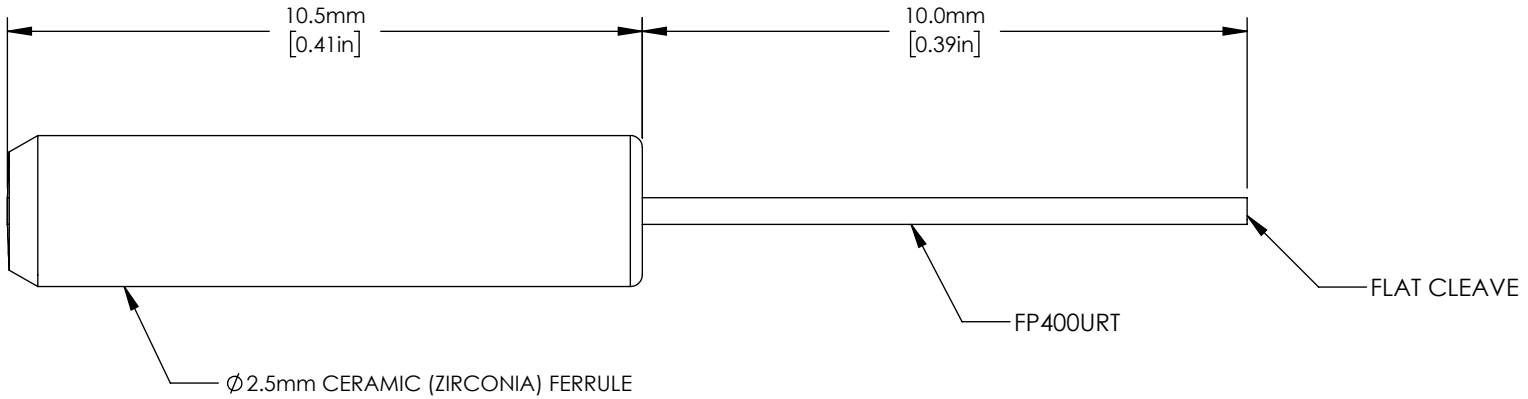

*INCLUDED BUT NOT SHOWN:
1 PROTECTIVE DUST CAP

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	IR	12/MAY/18
APPROVAL	CL	17/MAY/18

COPYRIGHT © 2018 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

2.5mm CERAMIC FIBER OPTIC CANNULA
400µm, 0.50NA, 10mm LONG

MATERIAL	REV
N/A	A

ITEM #	APPROX WEIGHT
CFMC54L10	0.30 g