

FIBER SPECIFICATIONS*					
FIBER TYPE	CORE DIAMETER	CLADDING DIAMETER**	COATING DIAMETER	NA	OPERATING WAVELENGTH
FP400URT	400 ± 8 µm	425 ± 10 µm	730 ± 30 µm	0.50	300 - 1200 nm

*SPECIFICATIONS BASED ON BARE FIBER DATA
**OUTER DIAMETER OF FIBER PROTRUDING FROM FERRULE



ISOMETRIC VIEW
SCALE 6:1

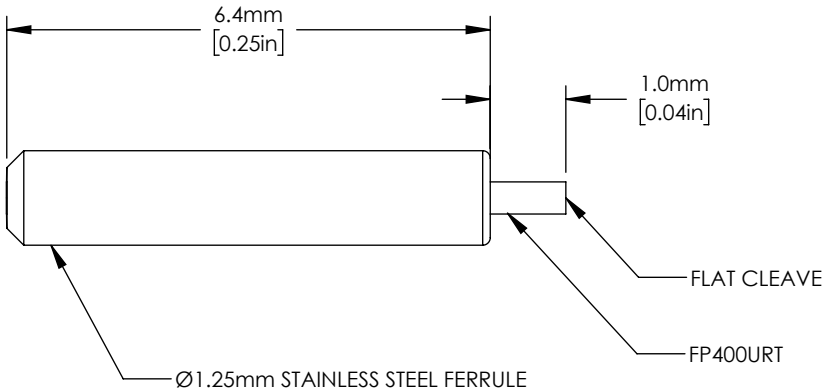

INCLUDED BUT NOT SHOWN:
- 1 PROTECTIVE DUST CAP

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	CG	06/JUL/26
APPROVAL	TZ	07/JUL/26

COPYRIGHT © 2026 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

Ø1.25mm STAINLESS FIBER OPTIC CANNULA
400µm 0.50NA, 1mm LONG

MATERIAL	REV
N/A	A

ITEM #	APPROX WEIGHT
CFML15L01	0.04 g