

| FIBER SPECIFICATIONS* | | | | | |
|---|---|---|---|---|---|
| FIBER TYPE | CORE DIAMETER | CLADDING DIAMETER | COATING DIAMETER** | NA | OPERATING WAVELENGTH |
| FG200UCC | 200 µm ± 8 µm | 240 µm ± 5 µm | 260 ± 6 µm | 0.22 ± 0.02 | 250 - 1200 nm |

*SPECIFICATIONS BASED ON BARE-FIBER DATA.
** OUTER DIAMETER OF FIBER PROTRUDING FROM FERRULE



ISOMETRIC VIEW
SCALE 6:1

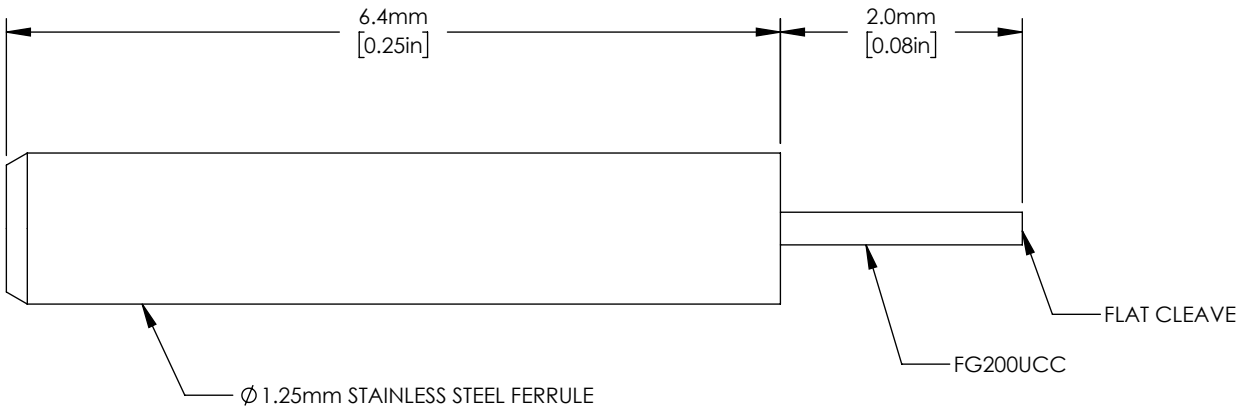


*INCLUDED BUT NOT SHOWN:
1 PROTECTIVE DUST CAP

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

| | | |
|---|---|---|
| DRAWING PROJECTION | | |
| | NAME | DATE |
| DRAWN | CL | 18/SEP/13 |
| APPROVAL | BAG | 24/MAY/17 |

COPYRIGHT © 2017 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

1.25mm STAINLESS FIBER OPTIC CANNULA, 200µm, 0.22NA, 2mm LONG

| MATERIAL | REV |
|---|---|
| N/A | C |

| ITEM # | APPROX WEIGHT |
|---|---|
| CFML22L02 | 0.40 g |