

FIBER SPECIFICATIONS*					
FIBER TYPE	CORE DIAMETER	CLADDING DIAMETER**	COATING DIAMETER	NA	OPERATING WAVELENGTH
FT400EMT	400 ± 8 µm	425 ± 10 µm	730 ± 30 µm	0.39	400 - 2200 nm

*SPECIFICATIONS BASED ON BARE-FIBER DATA.
** OUTER DIAMETER OF FIBER PROTRUDING FROM FERRULE

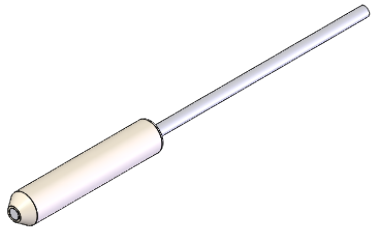

ISOMETRIC VIEW
SCALE 4:1

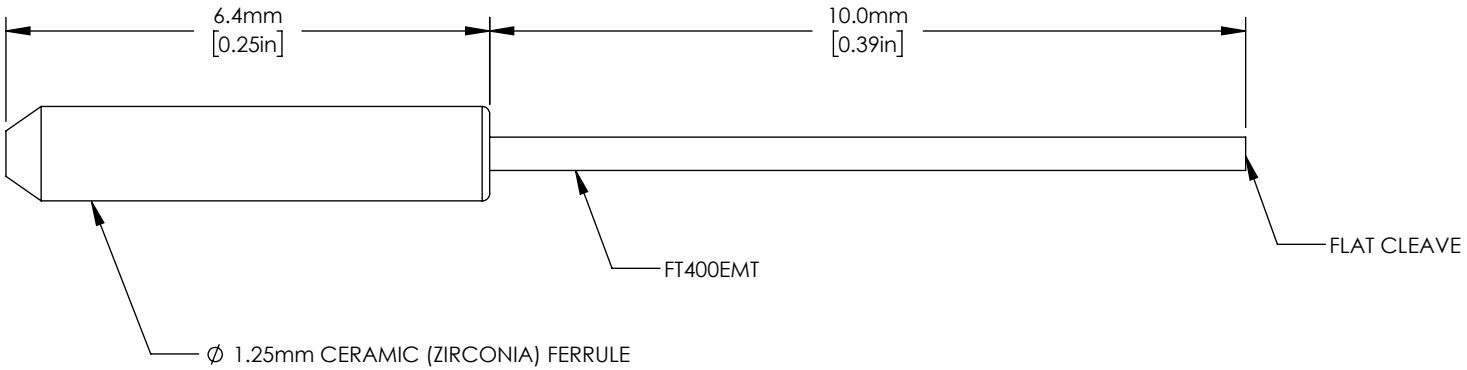

*INCLUDED BUT NOT SHOWN:
1 PROTECTIVE DUST CAP

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	IR	26/APR/16
APPROVAL	BAG	24/MAY/17

COPYRIGHT © 2017 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

1.25mm CERAMIC FIBER OPTIC CANNULA, 400µm, 0.39NA, 10mm LONG

MATERIAL: N/A

REV: B

ITEM #: CFMLC14L10

APPROX WEIGHT: 0.04 g