

FIBER SPECIFICATIONS*					
FIBER TYPE	CORE DIAMETER	CLADDING DIAMETER**	COATING DIAMETER	NA	OPERATING WAVELENGTH
FG105LCA	105 +1/-3 µm	125 +1/-2 µm	250 ±10 µm	0.22 ± 0.02	400 - 2400 nm

*SPECIFICATIONS BASED ON BARE-FIBER DATA
** OUTER DIAMETER OF FIBER PROTRUDING FROM FERRULE

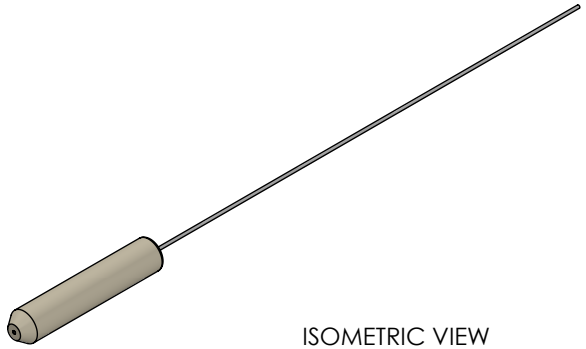

ISOMETRIC VIEW
SCALE 4:1

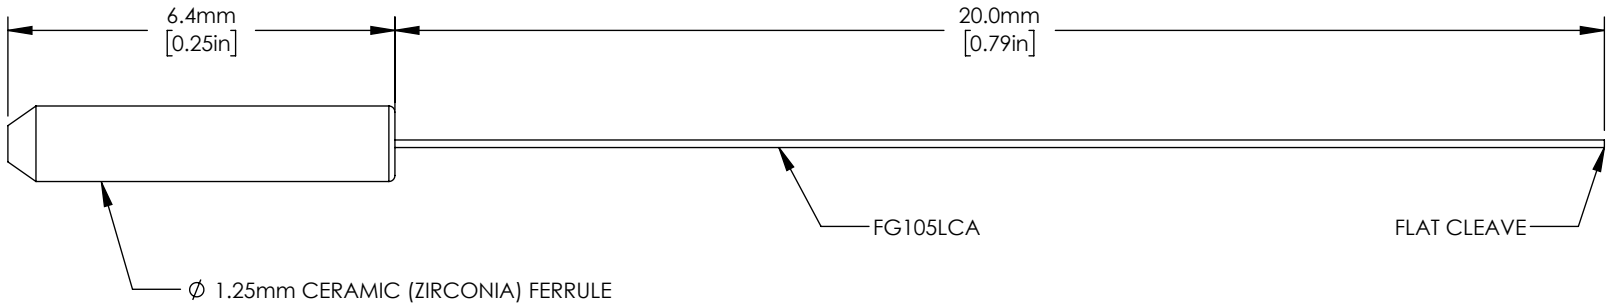

*INCLUDED BUT NOT SHOWN:
1 PROTECTIVE DUST CAP

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	JL	07/MAY/15
APPROVAL	HC	19/APR/22

COPYRIGHT © 2017 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

1.25mm CERAMIC FIBER OPTIC CANNULA
105 µm, 0.22NA, 20mm LONG

MATERIAL	REV
N/A	C

ITEM #	APPROX WEIGHT
CFMLC21L20	0.04 g