

FIBER SPECIFICATIONS*					
FIBER TYPE	CORE DIAMETER	CLADDING DIAMETER**	COATING DIAMETER	NA	OPERATING WAVELENGTH
FP200ERT	200 ± 5 µm	225 ± 5 µm	500 ± 30 µm	0.50 ± 0.02	400 - 2200 nm

*SPECIFICATIONS BASED ON BARE-FIBER DATA
** OUTER DIAMETER OF FIBER PROTRUDING FROM FERRULE

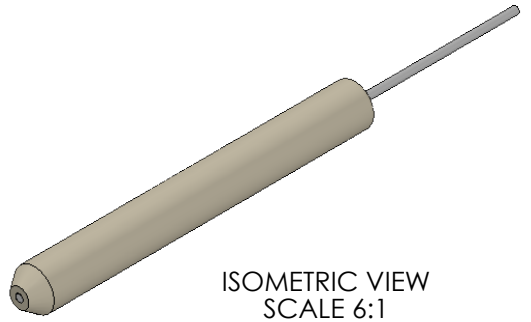

ISOMETRIC VIEW
SCALE 6:1

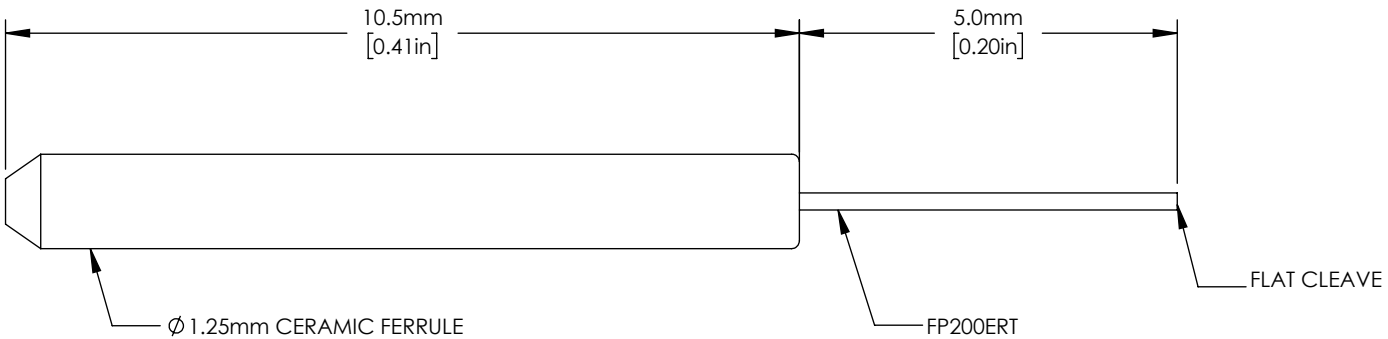

INCLUDED BUT NOT SHOWN:
1 PROTECTIVE DUST CAP

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	IR	04/JUN/17
APPROVAL	CL	11/JUN/17

COPYRIGHT © 2017 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

10.5mm LONG 1.25mm CERAMIC FIBER OPTIC CANNULA, 200µm 0.50NA, 5mm LONG

MATERIAL	REV
N/A	A

ITEM #	APPROX WEIGHT
CFMXC05	0.07 g