


PARAMETER	SPECIFICATION
PARCENTRICITY[a,b], SINGLE POSITION	±10 µm
PARCENTRICITY[c,d], MULTIPLE POSITIONS	±40 µm
PARFOCALITY[a,b], SINGLE POSITION	±2 µm
PARFOCALITY[a,d], MULTIPLE POSITIONS	±10 µm

a. Measured using 40X objective.
b. "Single Position" refers to a test conducted on one position at a time after full rotations
c. System alignment optimized for 4X & 40X at starting position.
d. "Multiple Positions" refers to a test conducted on every position relative to position 1.

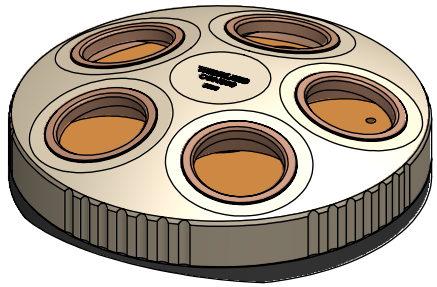

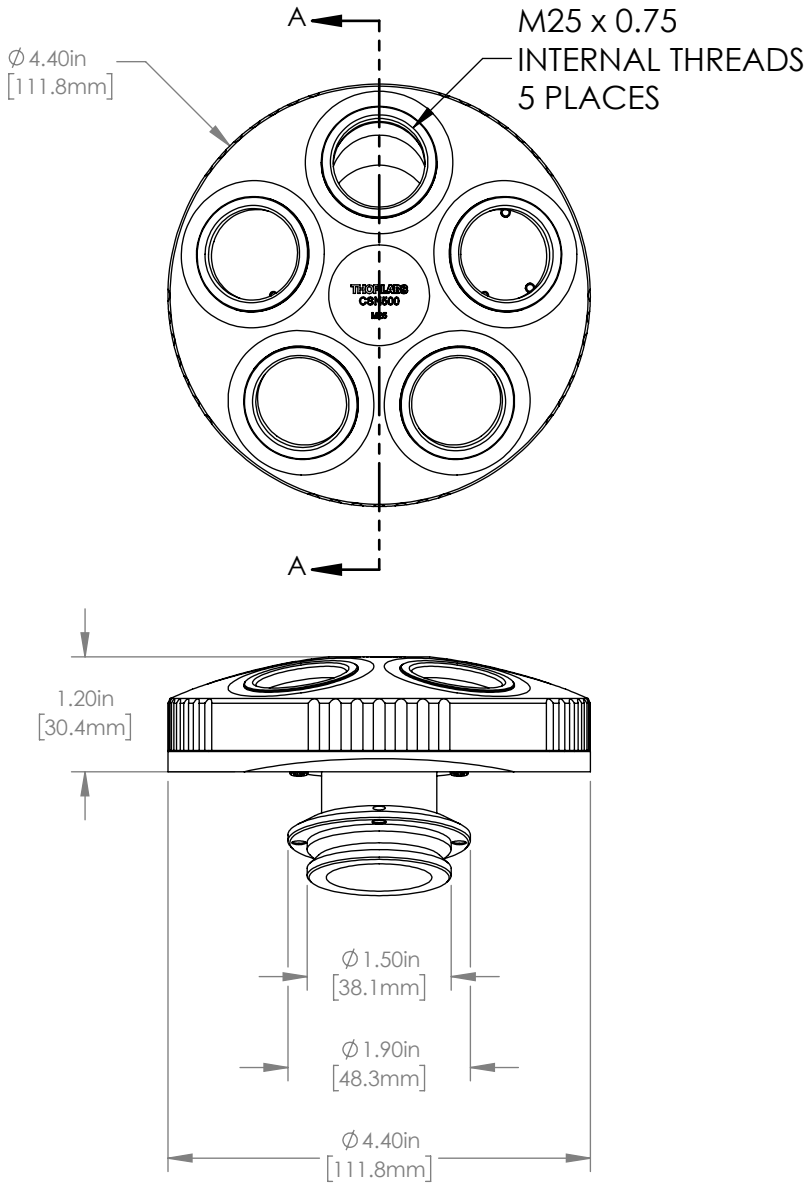

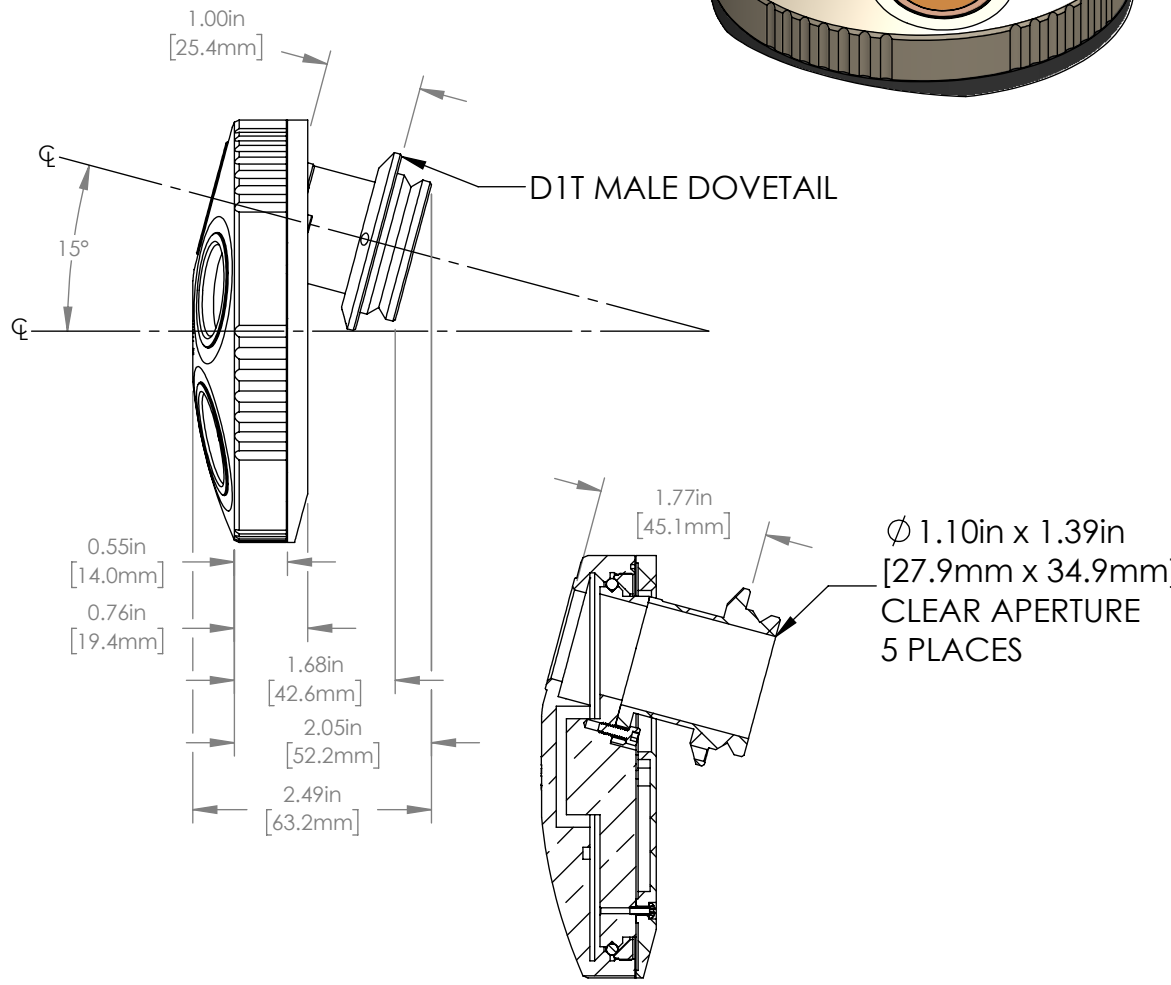

SECTION A-A

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	GY	20/JUL/18
APPROVAL	GT	20/JUL/18

COPYRIGHT © 2018 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

QUINTUPLE OBJECTIVE NOSEPIECE, M25 x 0.75 THREADS

MATERIAL	REV
N/A	A

ITEM #	APPROX WEIGHT
CSN500	1.04 kg