

SPECIFICATIONS*	
DESIGN WAVELENGTH (nm)	455
WAVELENGTH RANGE (nm)	400-900
COUPLING RATIO	50:50 ± 3.5%
INSERTION LOSS @ 455 nm (dB)	≤5.5
DIRECTIVITY (dB)	≥40
OPERATING TEMPERATURE (°C)	-40 TO +85
STORAGE TEMPERATURE (°C)	-50 TO +85

*ALL SPECIFICATIONS ARE BASED ON NON-CONNECTORIZED MODELS
*PORTS ARE LABELED AS MARKED

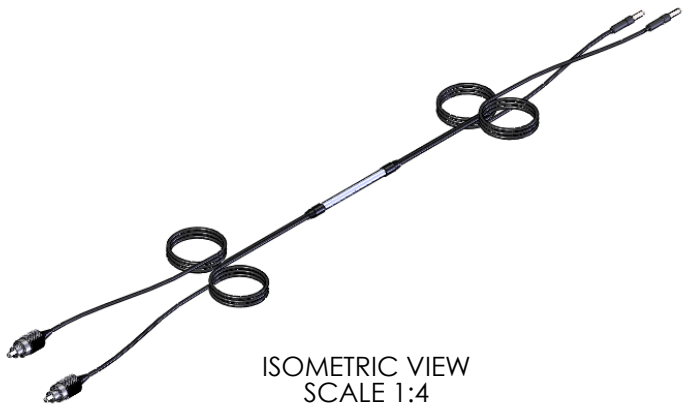

ISOMETRIC VIEW
SCALE 1:4

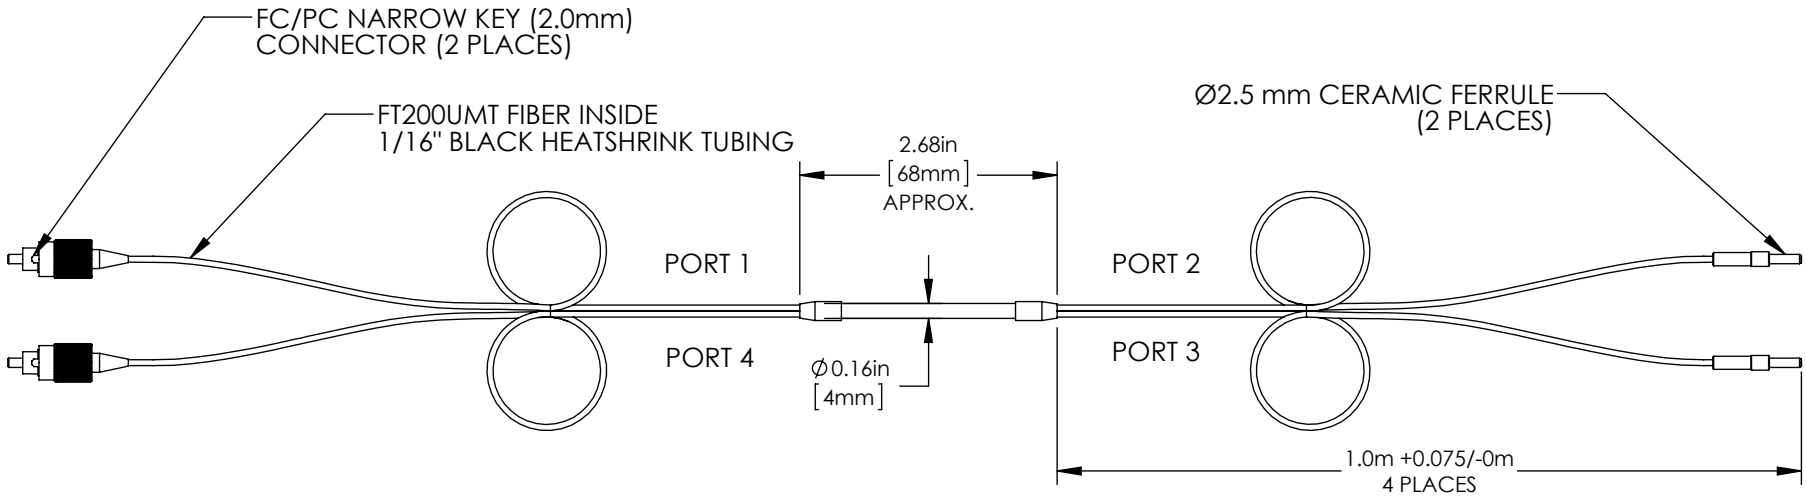

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	CAL	24/FEB/14
APPROVAL	BG	04/DEC/14

COPYRIGHT © 2014 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

2x2 MM COUPLER, 50:50 SPLIT RATIO, 200µm, 0.39 NA, FC/PC TO Ø2.5mm FERRULE

MATERIAL	REV
N/A	D

ITEM #	APPROX WEIGHT
FCMH2-FCF	90 g