
FIBER SPECIFICATIONS*					
ITEM #	CORE DIAMETER	CLADDING DIAMETER	COATING DIAMETER	NA	WAVELENGTH RANGE
FT200EMT	200 ± 5 µm	225 ± 5 µm	500 ± 30 µm	0.39	400 to 2200 nm

*SPECIFICATIONS BASED ON BARE FIBER DATA

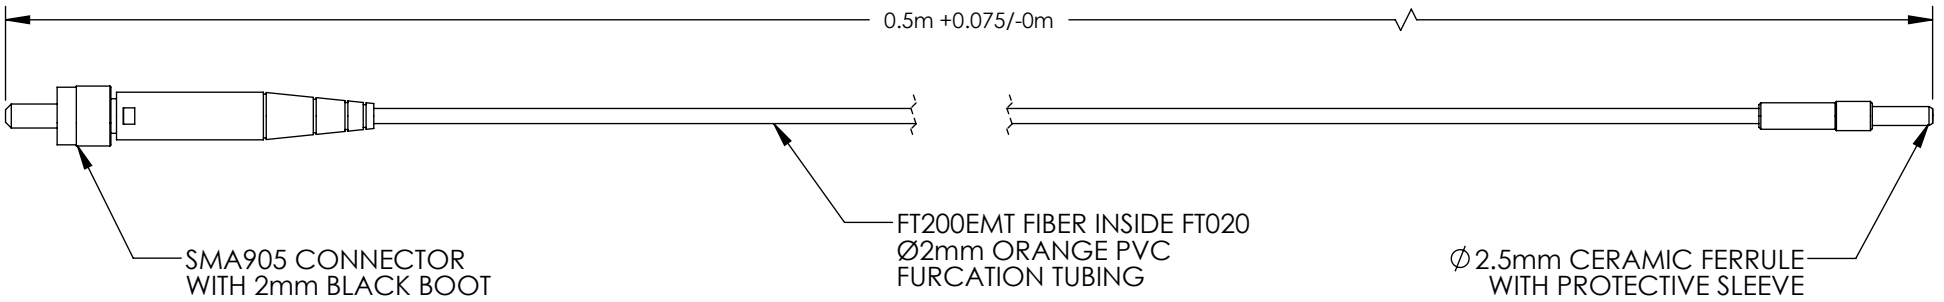

INCLUDED BUT NOT SHOWN:
- 2 PROTECTIVE DUST CAPS

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	JW	01/SEP/12
APPROVAL	BAG	08/APR/19

COPYRIGHT © 2019 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

0.5m, 200 µm 0.39 NA
SMA TO FC FERRULE PATCH CABLE

MATERIAL	REV
N/A	D

ITEM #	APPROX WEIGHT
M77L005	20g