
FIBER SPECIFICATIONS*						
ITEM #	CORE DIAMETER	CLADDING DIAMETER	COATING DIAMETER	BUFFER DIAMETER	NA	OPERATING WAVELENGTH
FG200UCC	200 ± 8 µm	240 ± 5 µm	260 ± 6 µm	400 ± 30 µm	0.22	250 to 1200 nm

*SPECIFICATIONS BASED ON BARE FIBER DATA

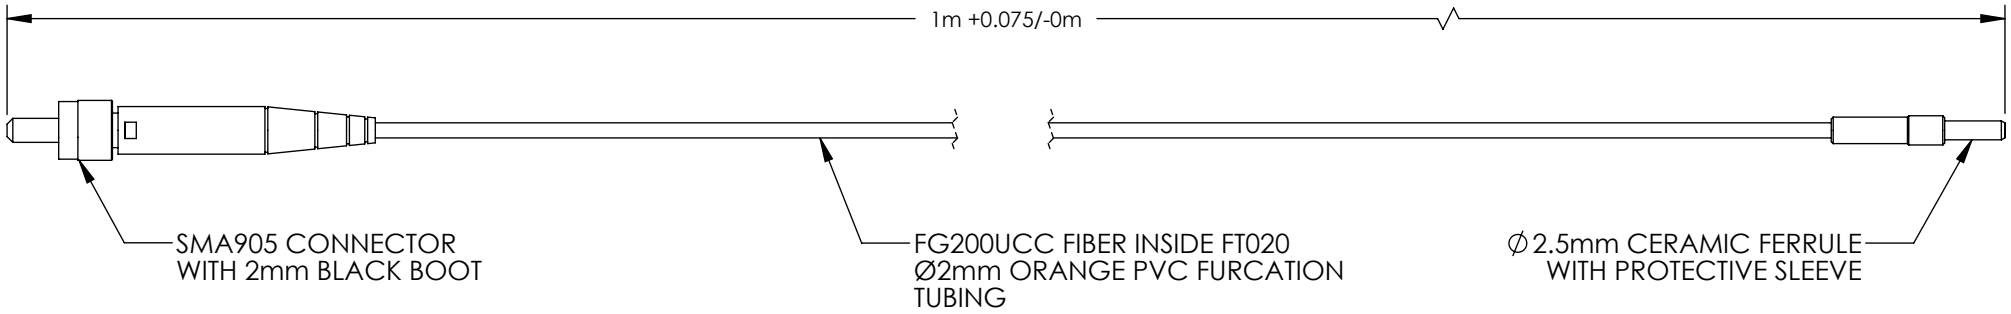

INCLUDED BUT NOT SHOWN:
- 2 PROTECTIVE DUST CAPS

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	CAL	23/SEP/13
APPROVAL	BAG	08/APR/19

COPYRIGHT © 2019 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

1m, 200 µm 0.22 NA
SMA TO FC FERRULE PATCH CABLE

MATERIAL	REV
N/A	E

ITEM #	APPROX WEIGHT
M84L01	20g