
FIBER SPECIFICATIONS*					
ITEM #	CORE DIAMETER	CLADDING DIAMETER	COATING DIAMETER	NA	WAVELENGTH RANGE
FP400URT	400 ± 8 µm	425 ± 10 µm	730 ± 30 µm	0.50	300 to 1200 nm

*SPECIFICATIONS BASED ON BARE FIBER DATA

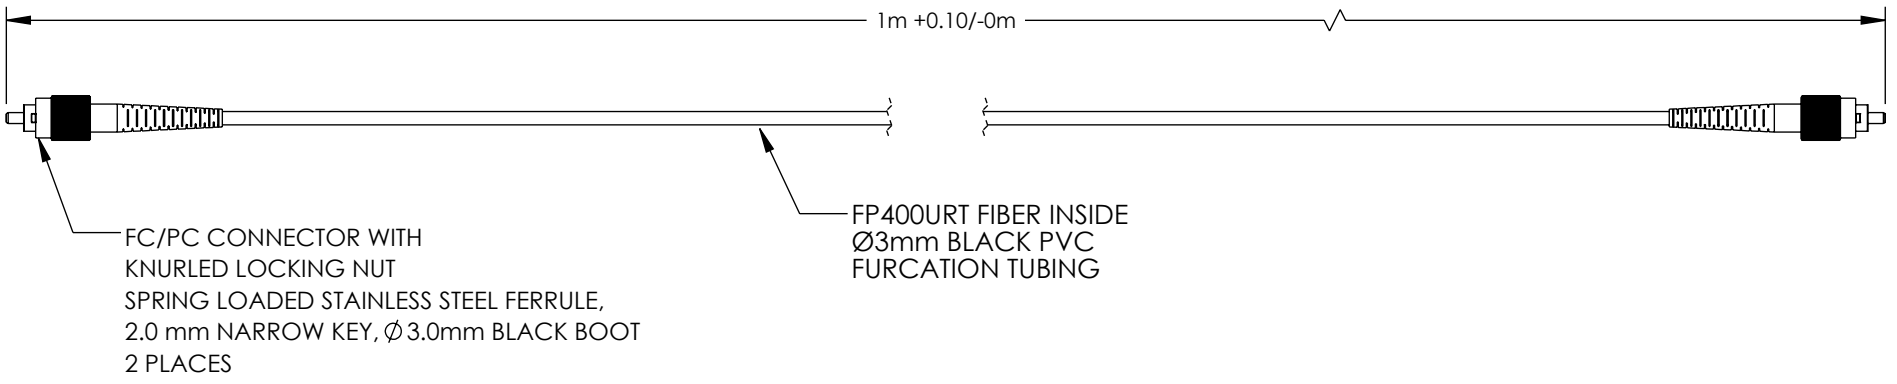

INCLUDED BUT NOT SHOWN:
- 2 PLASTIC DUST CAPS

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	IR	18/OCT/18
APPROVAL	HC	07/JUN/23

COPYRIGHT © 2023 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

1 m, 400 µm 0.50 NA LOW-AUTOFLUORESCENCE FC/PC CABLE

MATERIAL	REV
N/A	C

ITEM #	APPROX WEIGHT
MAF1L1	0.02kg