
FIBER SPECIFICATIONS*					
ITEM #	CORE DIAMETER	CLADDING DIAMETER	COATING DIAMETER	NA	WAVELENGTH RANGE
FP200URT	200 ± 5 µm	225 ± 5 µm	500 ± 30 µm	0.50	300 - 1200 nm

*SPECIFICATIONS BASED ON BARE FIBER DATA

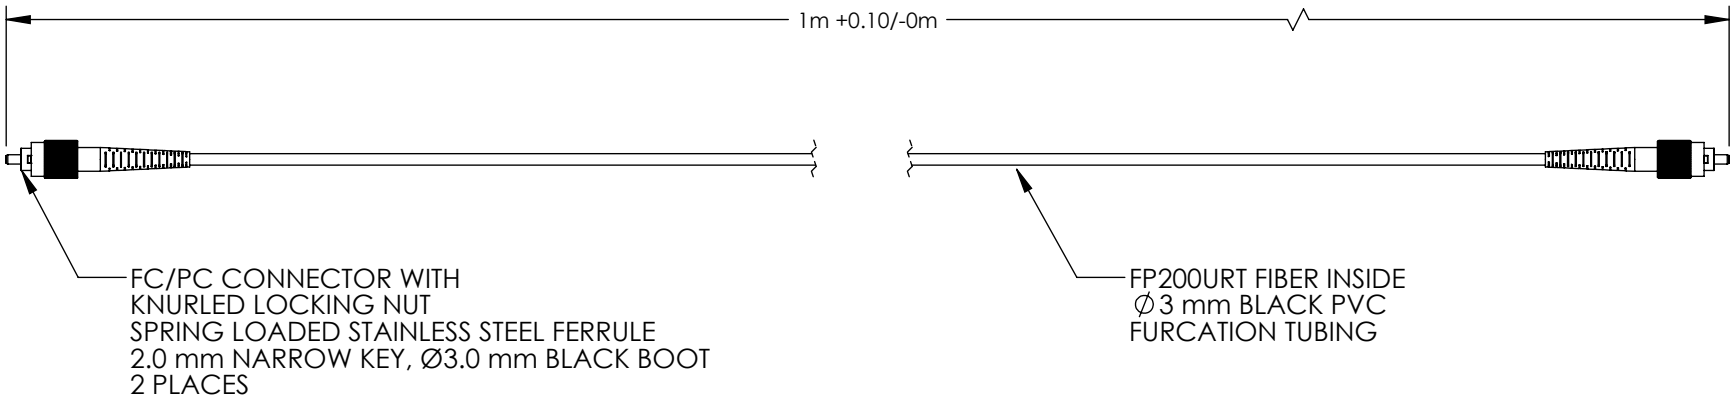

INCLUDED BUT NOT SHOWN:

- 2 PROTECTIVE DUST CAPS

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	LM	09/MAY/23
APPROVAL	PH	23/MAY/23

COPYRIGHT © 2023 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

1m, 200µm 0.50 NA, LOW- AUTOFLUORESCENCE FC/PC CABLE

MATERIAL	REV
N/A	A

ITEM #	APPROX WEIGHT
MAF4L1	0.02 kg