





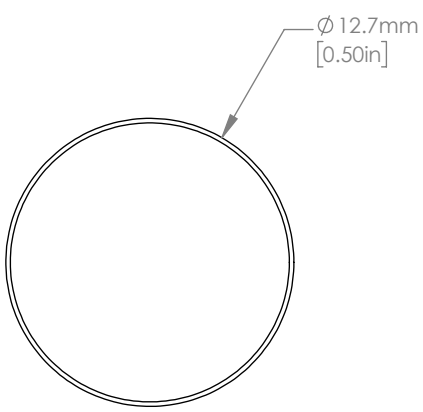

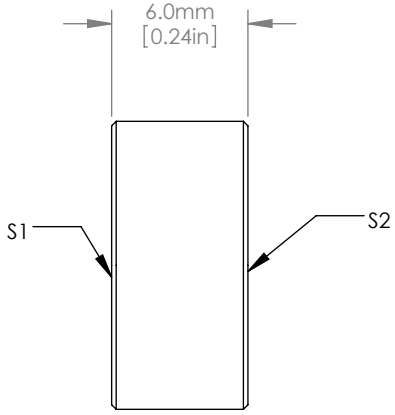



NOTES/SPECIFICATIONS:

1. CLEAR APERTURE: > Ø11.4mm
2. PARALLELISM: <3arcmin
3. SURFACE QUALITY (S1): 40-20 SCRATCH-DIG
4. SURFACE FLATNESS (S1): λ/10 AT 633nm
   (S2): FINE GRIND
5. COATING: PROTECTED SILVER
   Ravg: >97% FROM 450nm - 2µm
   Ravg: >95% FROM 2µm - 20µm
   AOI: 0° TO 45°

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	BAG	26/OCT/10
APPROVAL	DS	18/NOV/22

COPYRIGHT © 2022 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

Ø12.7mm PROTECTED SILVER MIRROR

MATERIAL	REV
FUSED SILICA	D

ITEM #	APPROX WEIGHT
PF05-03-P01	2 g