


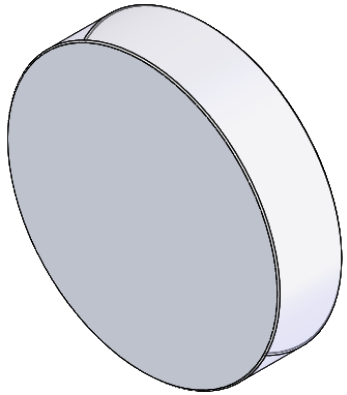


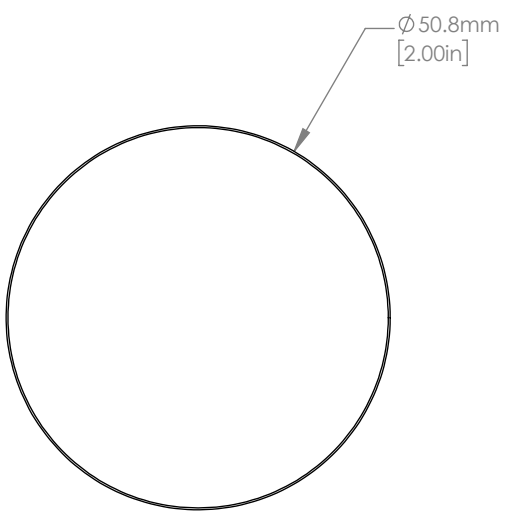

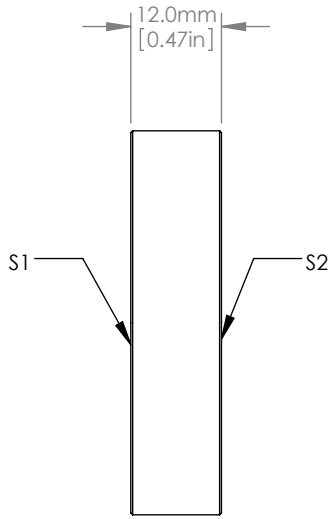

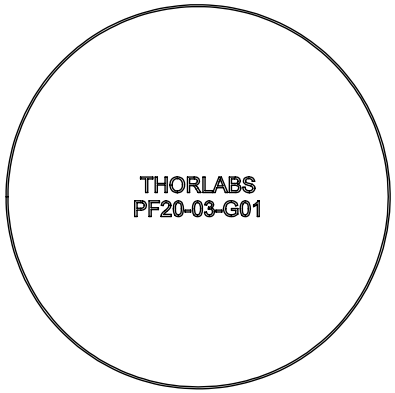

NOTES/SPECIFICATIONS:

1. CLEAR APERTURE: > ∅45.7mm
2. PARALLELISM: ≤ 3arcmin
3. SURFACE QUALITY (S1): 40-20 SCRATCH-DIG
4. SURFACE FLATNESS (S1): λ/10 AT 633nm
   (S2): FINE GRIND
5. COATING: PROTECTED ALUMINUM
   Ravg: >90% FROM 450nm - 2µm
   Ravg: >95% FROM 2µm - 20µm
   AOI: 0° TO 45°

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	BAG	26/OCT/10
APPROVAL	BW	25/OCT/17

COPYRIGHT © 2018 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

∅50.8mm PROTECTED ALUMINUM MIRROR

MATERIAL	REV
FUSED SILICA	D

ITEM #	APPROX WEIGHT
PF20-03-G01	54 g