

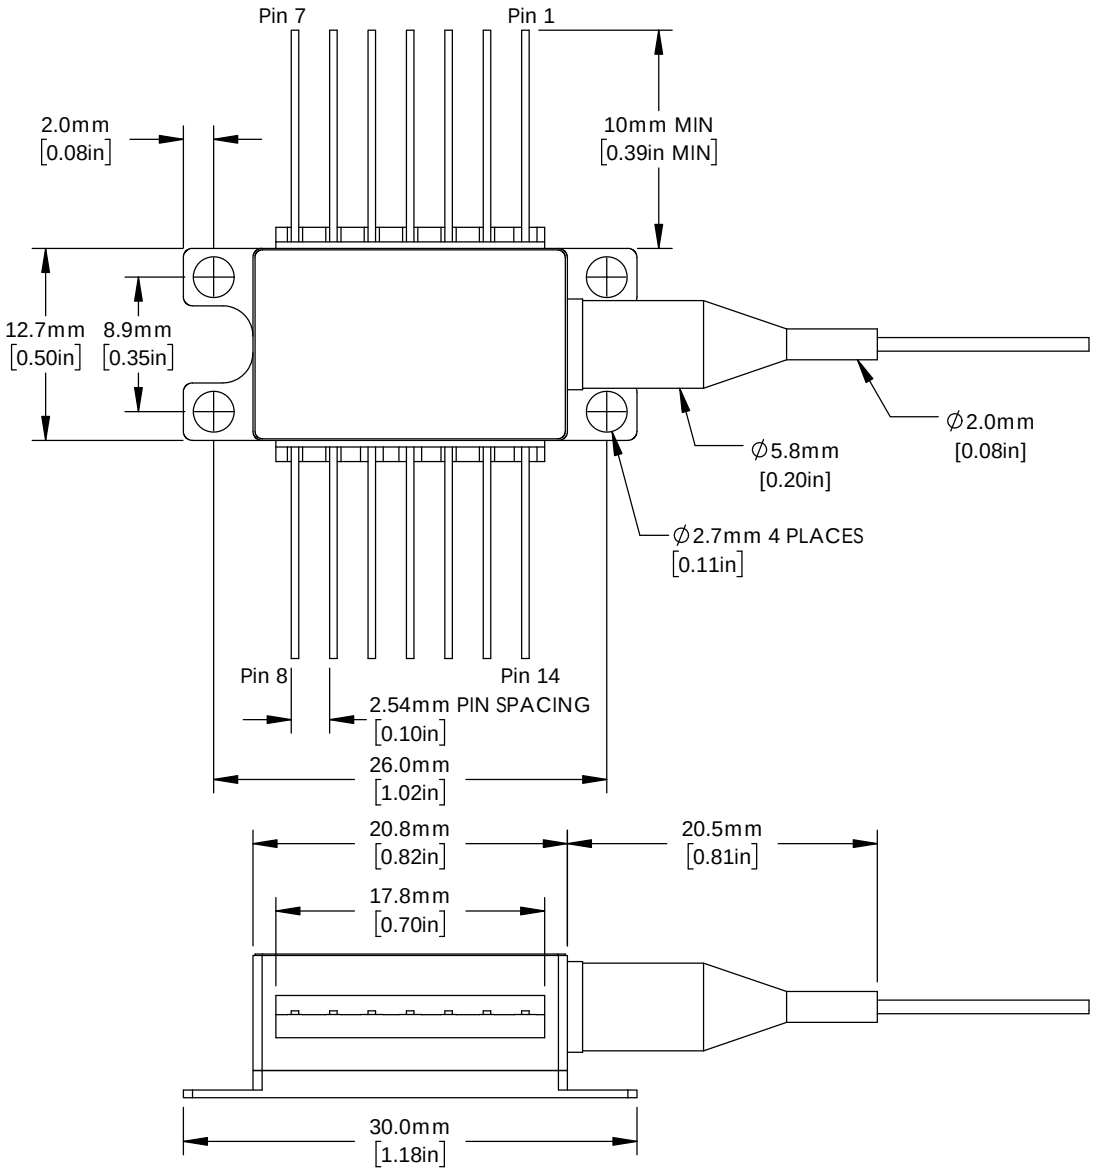


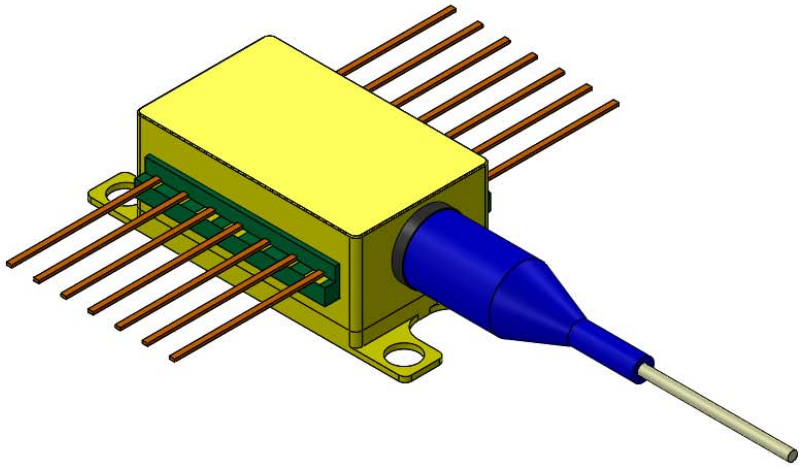

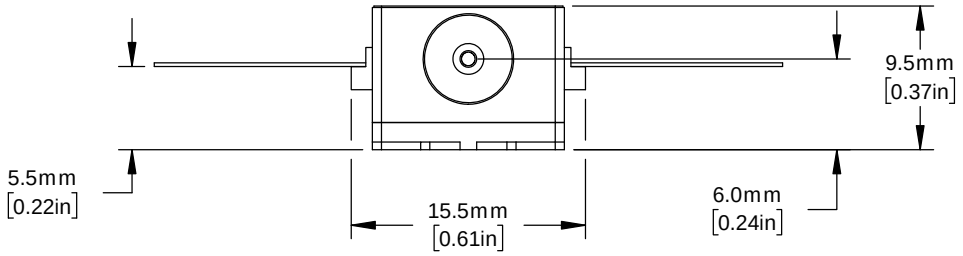

Pin Identification	
1. TEC +	14. TEC -
2. Thermistor	13. Case Ground
3. NC	12. NC
4. NC	11. Device Cathode
5. Thermistor	10. Device Anode
6. NC	9. NC
7. NC	8. NC

NOTES :

1. DEVICE IS PROVIDED WITH A 1500mm ±50mm LENGTH FIBER TAIL TERMINATED IN AN FC/APC CONNECTOR; THE FIBER IS CORNING PM15-U40A TYPE PROTECTED BY 900um DIAMETER LOOSE TUBE.

FOR INFORMATION ONLY
NOT FOR MANUFACTURING PURPOSES

DRAWING PROJECTION		
	NAME	DATE
DRAWN	PS	01/JUL/21
APPROVAL	WY	09/AUG/21

COPYRIGHT © 2021 BY THORLABS

VALUES IN PARENTHESIS ARE CALCULATED AND MAY CONTAIN ROUNDOFF ERRORS

THORLABS
www.thorlabs.com

SLD (1450 nm 14 pin PM)

MATERIAL	REV
N/A	A

ITEM #	APPROX WEIGHT
SLD1450P	0.025 kg